

## ULTRA SLIM HIGH PERFORMER IN SYSTEM CEILING

# IDUN SLIM

- ✔ Modern and ultraslim design for very shallow cavity with a luminous efficacy of 105 lm/W
- ✔ Perfect suitable for offices, corridors, meeting rooms and schools
- ✔ Idun Slim is compliant with the DIN EN 12464-1 requirements for workplaces: UGR <19
- ✔ Easy installation via plug & play with euro cable (2meter) and maintenance free
- ✔ Idun Slim is suitable for almost any application: recessed version for visible T-profiles, with mounting frame for direct ceiling mounting or as suspended version with steel cables





## GENERAL SPECIFICATIONS

Luminous flux	3400 lm				4000 lm			
System power	31,5				38			
Luminous efficacy	108				105			
Optics	prismatic				opal			
UGRR (4h/8h)	UGRcen (4Hx8H, 0.25H) 19 EN12464-1 65 deg, 3000 cd/m2				UGRcen (4Hx8H, 0.25H) 22			
Dimensions (Height 10)	595 x 595	620 x 620	1195 x 295	1245 x 308	595 x 595	620 x 620	1195 x 295	1245 x 308
System size	600 x 600	625 x 625	1200 x 300	1250 x 310	600 x 600	625 x 625	1200 x 300	1250 x 310
Cover material	PMMA							
Colour temperature	4000 K / 3000 K							
CRI	CRI > 80							
Lifetime	50.000 h (L80/B10) at 25°C							
Operating temperature	-20 °C to +40°C							
Certifications	CE, RoHS							



IP40  
ceiling  
face

IP20  
above  
ceiling

IK02

## ELETRICAL SPECIFICATIONS


<b>Driver</b>	Standard, DALI
<b>Input</b>	200-240V
<b>Input voltage</b>	<0,5 s
<b>PF, THD</b>	0.97; <20%
<b>Emergency unit</b>	II

## COMPLIMENTARY SPECIFICATIONS

<b>Housing material</b>	weiß lackiertes Aluminiumgehäuse
<b>Optic material</b>	PMMA (Polymethylmethacrylate)
<b>Weight</b>	3,5 kg
<b>Optionale</b>	Surface mounting frame
<b>Mounting acc.</b>	or suspension set

## DIMENSIONAL DRAWING



All measures in millimeter

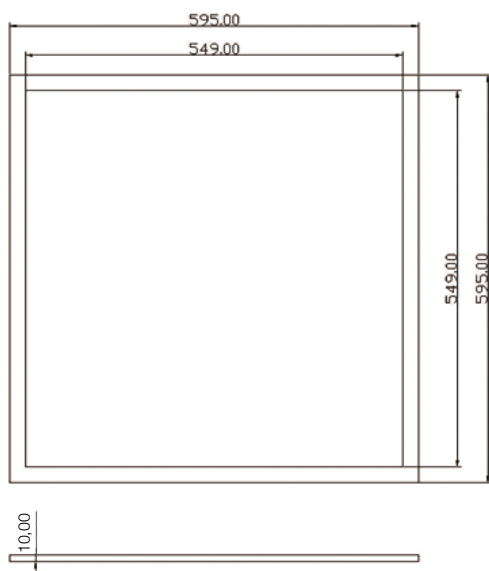

## LIGHT DISTRIBUTION

Opal

Prismatic



Also available with 620 x 620 x 10 mm , 295 x 1195 x 10 mm , 312 x 1250 x 10 mm

PREFERED SELECTION

Type	System power (W)	Luminous flux (lm)	Luminous efficacy (lm/W)	Colour temperature (K)	CRI (R <sub>a</sub> )	Order number
<b>IDUN SLIM 3400LM 840 STD 625x625 PR</b>	31,5	3400	108	4000	>80	72000000
<b>IDUN SLIM 3400LM 830 STD 625x625 PR</b>	31,5	3400	108	3000	>80	72000001
<b>IDUN SLIM 3400LM 840 DALI 625x625 PR</b>	31,5	3400	108	4000	>80	72000002
<b>IDUN SLIM 3400LM 830 DALI 625x625 PR</b>	31,5	3400	108	3000	>80	72000003
<b>IDUN SLIM 3400LM 840 STD 1250x312 PR</b>	31,5	3400	108	4000	>80	72000004
<b>IDUN SLIM 3400LM 830 STD 1250x312 PR</b>	31,5	3400	108	3000	>80	72000005
<b>IDUN SLIM 3400LM 840 DALI 1250x312 PR</b>	31,5	3400	108	4000	>80	72000006
<b>IDUN SLIM 3400LM 830 DALI 1250x312 PR</b>	31,5	3400	108	3000	>80	72000007
<b>IDUN SLIM 4000LM 840 STD 625x625 O</b>	38	4000	105	4000	>80	72000008
<b>IDUN SLIM 4000LM 830 STD 625x625 O</b>	38	4000	105	3000	>80	72000009
<b>IDUN SLIM 4000LM 840 DALI 625x625 O</b>	38	4000	105	4000	>80	72000010
<b>IDUN SLIM 4000LM 830 DALI 625x625 O</b>	38	4000	105	3000	>80	72000011
<b>IDUN SLIM 4000LM 840 STD 1250x312 O</b>	38	4000	105	4000	>80	72000012
<b>IDUN SLIM 4000LM 830 STD 1250x312 O</b>	38	4000	105	3000	>80	72000013
<b>IDUN SLIM 4000LM 840 DALI 1250x312 O</b>	38	4000	105	4000	>80	72000014
<b>IDUN SLIM 4000LM 830 DALI 1250x312 O</b>	38	4000	105	3000	>80	72000015
<b>IDUN SLIM 3400LM 840 STD 600x600 PR</b>	31,5	3400	108	4000	>80	72000016
<b>IDUN SLIM 3400LM 830 STD 600x600 PR</b>	31,5	3400	108	3000	>80	72000017
<b>IDUN SLIM 3400LM 840 DALI 600x600 PR</b>	31,5	3400	108	4000	>80	72000018
<b>IDUN SLIM 3400LM 830 DALI 600x600 PR</b>	31,5	3400	108	3000	>80	72000019
<b>IDUN SLIM 3400LM 840 STD 1200x300 PR</b>	31,5	3400	108	4000	>80	72000020
<b>IDUN SLIM 3400LM 830 STD 1200x300 PR</b>	31,5	3400	108	3000	>80	72000021
<b>IDUN SLIM 3400LM 840 DALI 1200x300 PR</b>	31,5	3400	108	4000	>80	72000022
<b>IDUN SLIM 3400LM 830 DALI 1200x300 PR</b>	31,5	3400	108	3000	>80	72000023
<b>IDUN SLIM 4000LM 840 STD 600x600 O</b>	38	4000	105	4000	>80	72000024
<b>IDUN SLIM 4000LM 830 STD 600x600 O</b>	38	4000	105	3000	>80	72000025
<b>IDUN SLIM 4000LM 840 DALI 600x600 O</b>	38	4000	105	4000	>80	72000026
<b>IDUN SLIM 4000LM 830 DALI 600x600 O</b>	38	4000	105	3000	>80	72000027
<b>IDUN SLIM 4000LM 840 STD 1200x300 O</b>	38	4000	105	4000	>80	72000028
<b>IDUN SLIM 4000LM 830 STD 1200x300 O</b>	38	4000	105	3000	>80	72000029
<b>IDUN SLIM 4000LM 840 DALI 1200x300 O</b>	38	4000	105	4000	>80	72000030
<b>IDUN SLIM 4000LM 830 DALI 1200x300 O</b>	38	4000	105	3000	>81	72000031